

 **AURUM**

forever tiles

600x600 mm

Scratch Free Carving Tiles



600x600 mm
Scratch Free Carving Tiles





TILES FEATURES



IMPACT
RESISTANT



STAIN
RESISTANT



SCRATCH
RESISTANT



FIRE
RESISTANT



RESISTANT TO
UV RAYS



FROST
RESISTANT




LIQUID
REPELLENT



Base Tile : Sand Dunestone Carving FT | Highlighter : Venetian Inlay Carving FT



SAND DUNESTONE CARVING FT

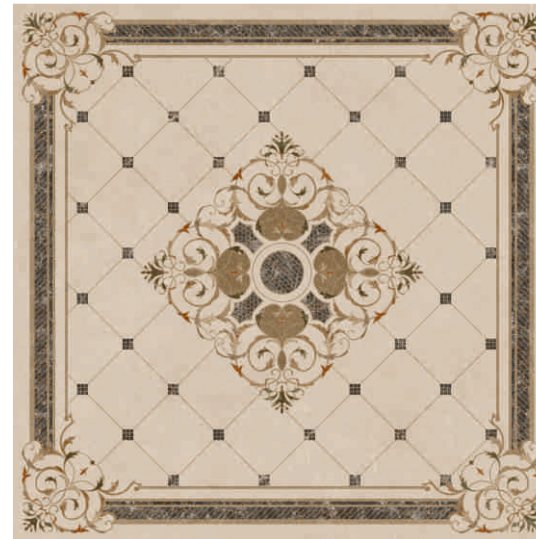


VENETIAN INLAY CARVING FT



Base Tile : Sand Dunestone Carving FT | Highlighter : Moroccan Trellis Carving FT



SAND DUNESTONE CARVING FT

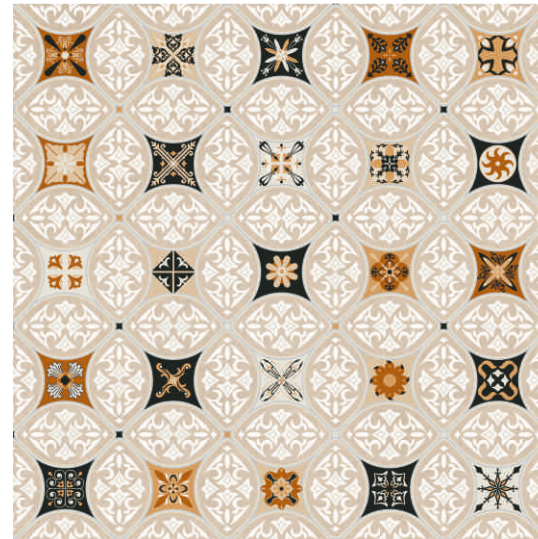


MOROCCAN TRELLIS CARVING FT



Base Tile : Sand Dunestone Carving FT | Highlighter : Vanilla Mosaico Carving FT



SAND DUNESTONE CARVING FT

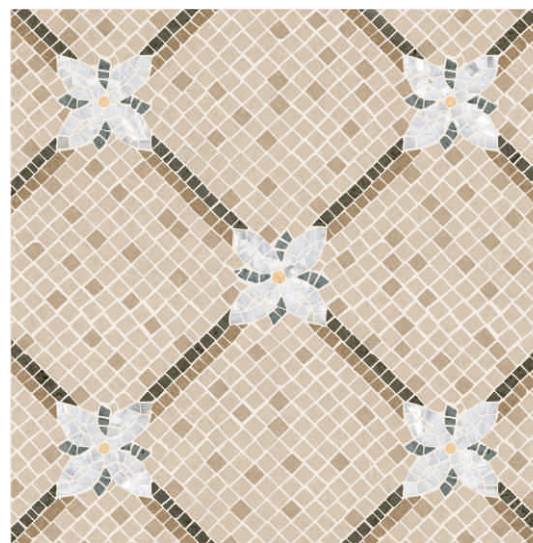

VANILLA MOSAICO CARVING FT



Base Tile : Khaki Dunestone Carving FT | Highlighter : Ottoman Floral Carving FT



KHAKI DUNESTONE CARVING FT



OTTOMAN FLORAL CARVING FT



Base Tile : Aura Statuario Marble Carving FT



AURA STATUARIO MARBLE CARVING FT



Base Tile : Venato Gold Carrara Marble Carving FT



VENATO GOLD CARRARA MARBLE
CARVING FT



Base Tile : Timber Luxe Oak Wood Carving FT




TIMBER LUXE OAK WOOD CARVING FT



Base Tile : Gris Jura Limestone Carving FT & Steel Jura Limestone Carving FT

Highlighter : Octo Mediterranean Carving FT

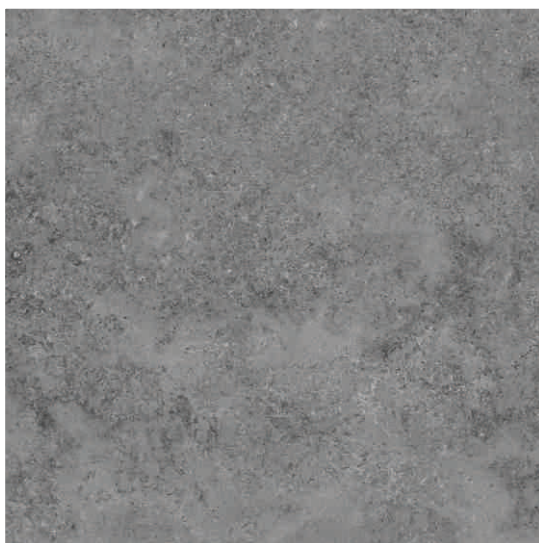

GRIS JURA LIMESTONE CARVING FT



OCTO MEDITERRANEAN CARVING FT



STEEL JURA LIMESTONE CARVING FT



Base Tile : Grey Thunder Gold Vein Carving FT & Brown Thunder Gold Vein Carving FT



GREY THUNDER GOLD VEIN
CARVING FT



BROWN THUNDER GOLD VEIN
CARVING FT



Base Tile : Perlato Honey Drift Marble Carving FT



PERLATO HONEY DRIFT MARBLE
CARVING FT

TECHNICAL SPECIFICATIONS

Scratch Free Forever Tiles



Packing Details				
Size (In mm.)	No. of Tiles Per Carton	Covered Area Per Carton		No. of Box Per Layer
		(In Sq. Mtr.)	(In Sq. Ft.)	
600x600	4	1.44	15.5	36
				No. of Layer Per Pallet
				1

Characteristics	Standard as Per IS 15622:2017 Group B Ib	OBL Norms	Testing Methods
Dimension & Surface Quality			
Deviation in Length & Width	± 0.1 %	±0.05%	IS 13630 Part 1
Deviation in Thickness	± 5.0 %	±3.0%	
Straightness of Sides	± 0.1 %	±0.1%	
Rectangularity	± 0.1 %	±0.1%	
Surface Flatness	± 0.5 %	± 0.2 %	
Surface Quality	Min 95% of the tiles shall be free from visible defects that would impair the appearance of a major area of the tile	Conforms	
Physical Properties			
Water Absorption %	Avg 0.08 < E ≤ 3.0% , Individual 3.30% Max	Avg ≤ 2.0 % , Individual 2.6% Max	IS 13630 Part 2
Modulus of Rupture in N/mm ²	Avg 30, Individual 27 Min	Average Min 30.0 individual 27, Min	IS 13630 Part 6
Breaking Strength N	700 Min for thickness < 7.5mm, 1100 Min for thickness ≥ 7.5 mm	1200 N Min	
Moisture Expansion	0.02, Max	0.02 Max	IS 13630 Part 3
Scratch Hardness (Moh's Scale)	5, Min	Min. 5 to 8 depending on surface/design	IS 13630 Part 13
Resistance to Surface Abrasion of glazed tiles Class I to V (Applicable for floor applications only)	Class II, Min	Class V	IS 13630 Part 11
Linear thermal expansion Co-efficient	6x10 ⁻⁶ , Max	Conforms	IS 13630 Part 4
Thermal Shock Resistance	10 Cycles, Min	Passed	IS 13630 Part 5
Crazing Resistance	4 Cycles at 7.5 Bar, Min	4 Cycles at 7.5 Bar, Min	IS 13630 Part 9
Impact Resistance	0.55, Min	0.6	IS 13630 Part 14
Frost Resistance	Required if agreed to between manufacturer and purchaser	Resistant	IS 13630 Part 10
Bulk density g/cc	2.0, Min	Min 2.10	IS 13630 Part 2
Chemical Properties			
Stain Resistance Glazed tiles	Class I, Min	Class -I	IS 13630 Part 8
Resistance to household chemicals	Class AA, Min	Class AA	
Resistance to acids and alkalis	Class AA, Min	Class AA	



CORPORATE OFFICE:

Iris House, 16 Business Centre,
Nangal Raya, New Delhi – 110046, India
Tel: +91-11-47119100

REGISTERED OFFICE:

8 Industrial Area, Sikandrabad – 203 205 (UP), India
Tel: +91-8191004575 / 76

CUSTOMER CARE

customercare@orientbell.com
Toll Free : 1800 208 1015

Call : 87507 11111
Whatsapp : 87507 33333

CIN: L14101UP1977PLC021546

Please join us on social media



www.orientbell.com



Making Tile Selection Easier



Tiles selected by you in your room



Share layout for a personalised render*

www.orientbell.com